
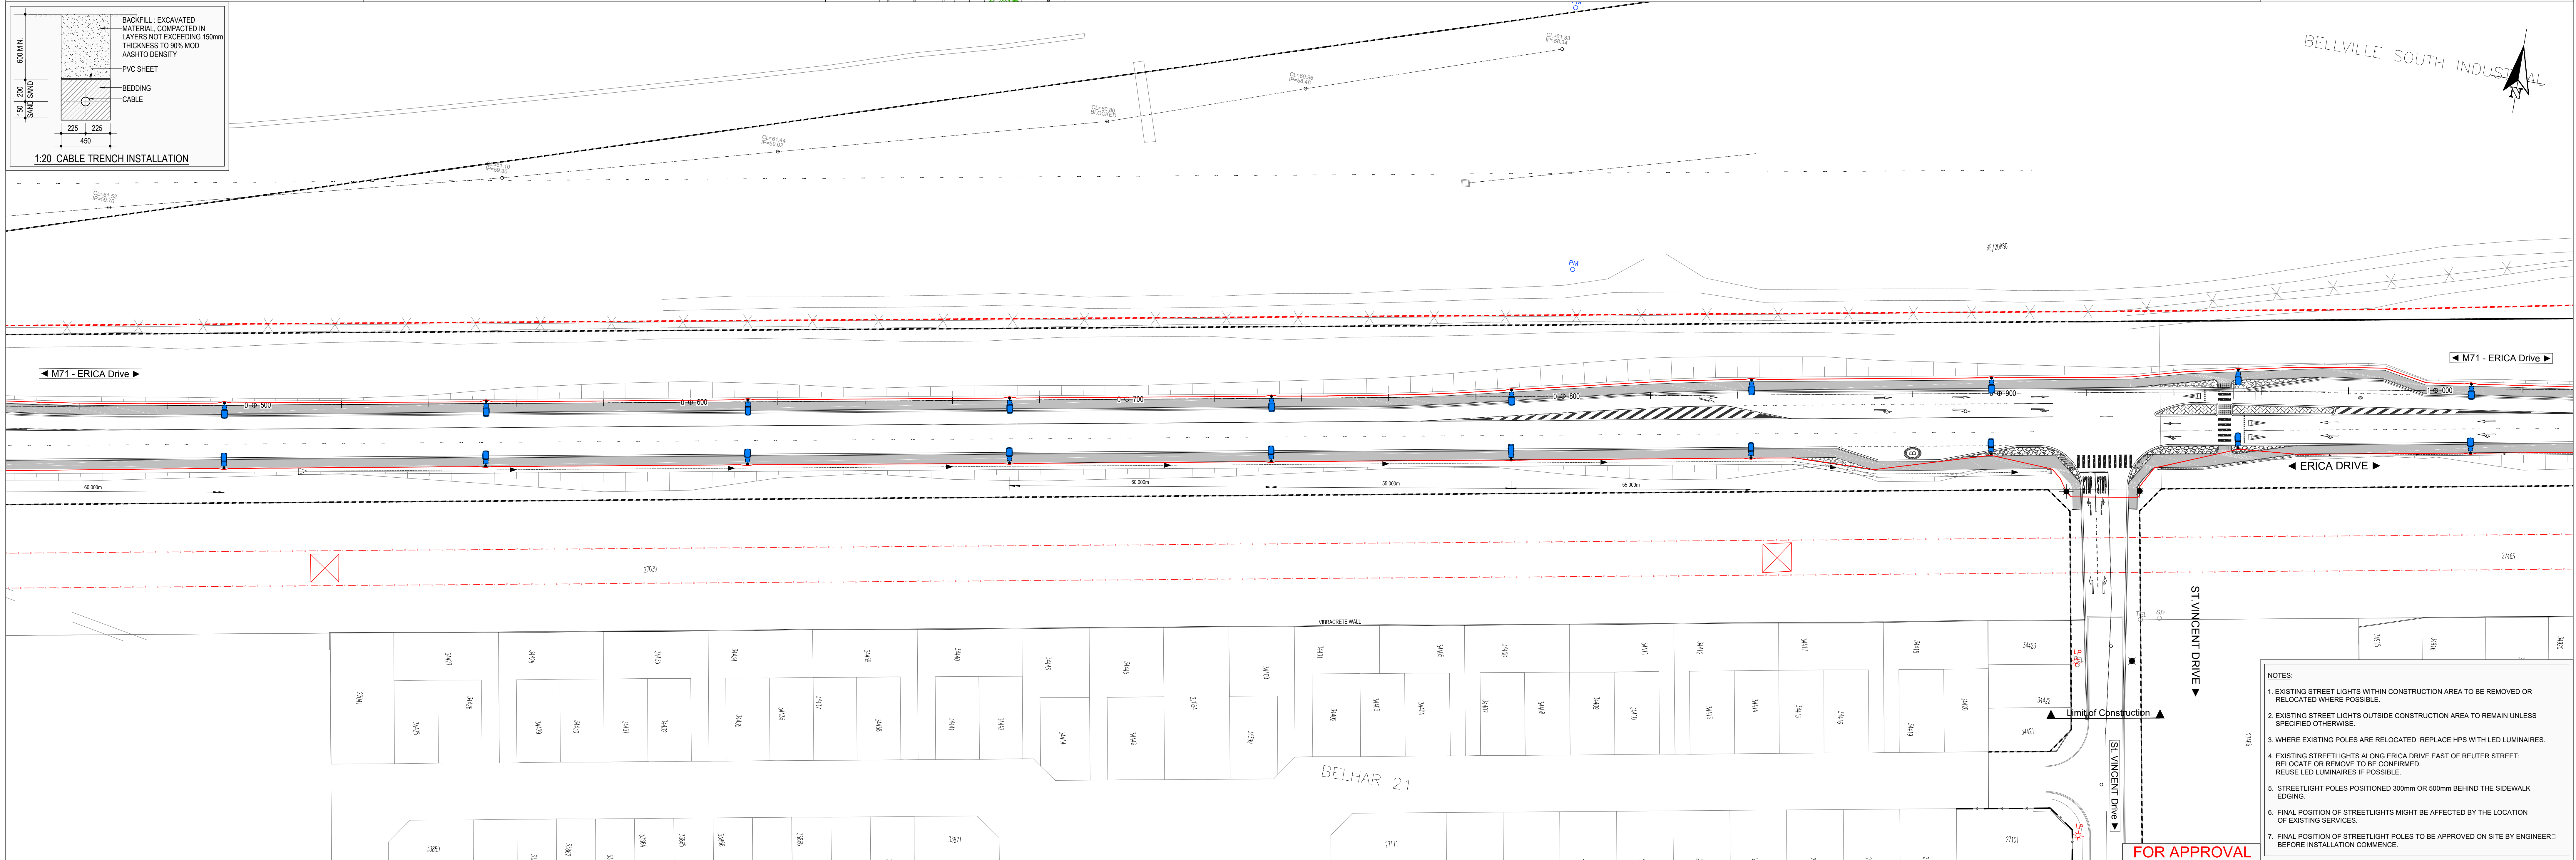


SYMBOL		LEGEND:
[Symbol]	LUMINAIRE NUMBER	DESCRIPTION
[Symbol]	L1	13.0m 31.8m M.H. POLE WITH 1 x 64 LED / 144W BEKA LED LUMINE MCI LUMINAIRE 5119 OPTICS 37500 LUMENS
[Symbol]	L10	13.0m 17.8m M.H. POLE INCLUDING 2m OUTREACH ARM WITH 1 x 64 LED / 144W BEKA LED LUMINE MCI LUMINAIRE 5118 OPTICS 37500 LUMENS
[Symbol]	L2	11.0m 9.3m M.H. POLE WITH 1 x 48 LED / 108W BEKA LED LUMINE MCI LUMINAIRE 5058 OPTIC 33333 LUMENS
[Symbol]	L3	13.5m 11.8m M.H. POLE WITH 1 x 96 LED / 211W BEKA LED LUMINE MCI LUMINAIRE 5117 OPTICS 25 958 LUMENS
[Symbol]	[Symbol]	RELOCATED LIGHT POLE
[Symbol]	[Symbol]	EXISTING LIGHT POLE

ASPHALT SIDEWALK	[Symbol]
STONE PITCHING	[Symbol]
CONCRETE	[Symbol]
BLOCK PAVING	[Symbol]
NEW ROAD RESERVE	[Symbol]
EXISTING ROAD RESERVE	[Symbol]
CABLE: STREET LIGHTING	[Symbol]
25mm ² ALUMINUM ELECTRICAL CABLES UNLESS OTHERWISE SPECIFIED	[Symbol]

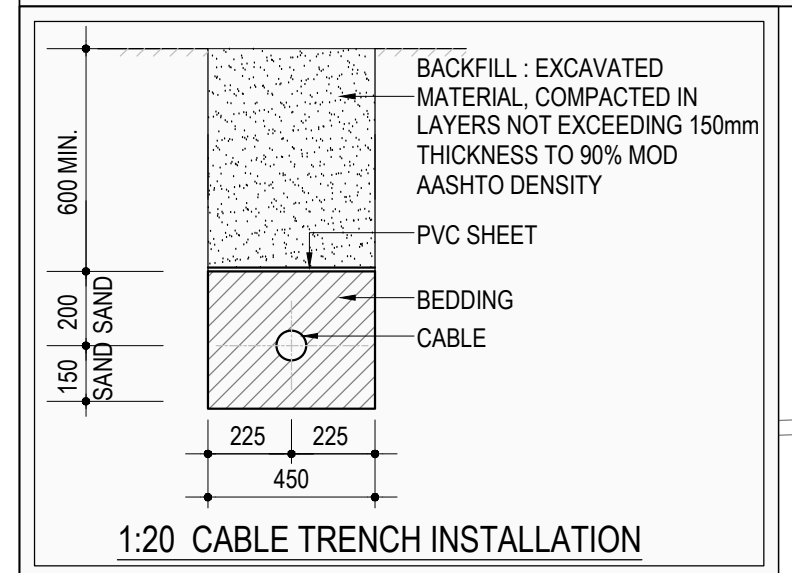

- NOTES:
- EXISTING STREET LIGHTS WITHIN CONSTRUCTION AREA TO BE REMOVED OR RELOCATED WHERE POSSIBLE.
 - EXISTING STREET LIGHTS OUTSIDE CONSTRUCTION AREA TO REMAIN UNLESS SPECIFIED OTHERWISE.
 - WHERE EXISTING POLES ARE RELOCATED, REPLACE HPS WITH LED LUMINAIRES.
 - EXISTING STREETLIGHTS ALONG ERICA DRIVE EAST OF REUTER STREET: RELOCATE OR REMOVE TO BE CONFIRMED. REUSE LED LUMINAIRES IF POSSIBLE.
 - STREETLIGHT POLES POSITIONED 300mm OR 500mm BEHIND THE SIDEWALK EDGING.
 - FINAL POSITION OF STREETLIGHTS MIGHT BE AFFECTED BY THE LOCATION OF EXISTING SERVICES.
 - FINAL POSITION OF STREETLIGHT POLES TO BE APPROVED ON SITE BY ENGINEER BEFORE INSTALLATION COMMENCE.

APPROVED - AS BUILTS	APPROVED - CONSTRUCTION
Name: _____	Name: _____
Prof. Reg. No.: _____	Prof. Reg. No.: _____
Date: _____	Date: _____

NO.	DATE	REVISION
A	28.08.18	ISSUED FOR APPROVAL

DESIGNED	CHECKED	SIGNED	DATE
W. LOUW	J.D.	[Signature]	
W. LOUW	[Signature]		